
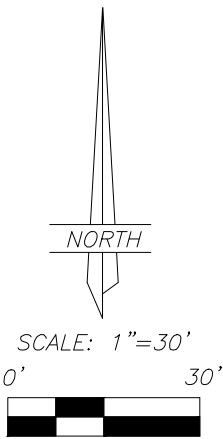
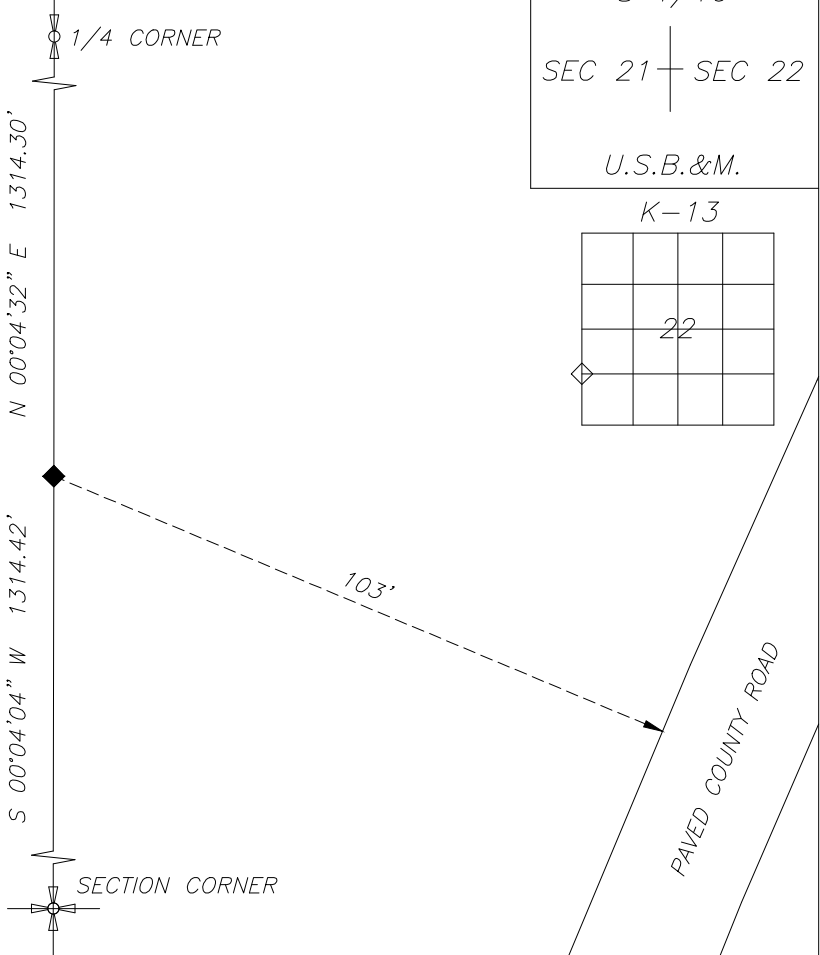
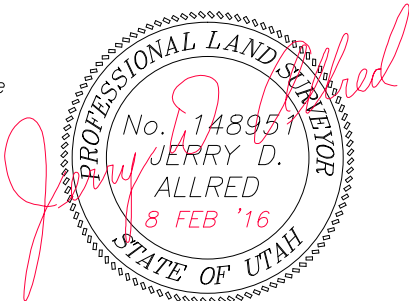


DUCHESNE COUNTY MONUMENT SURVEY RECORD		T2S R3W S 1/16 SEC 21   SEC 22 U.S.B.&M. K-13 
<div><p>SCALE: 1"=30'</p><p>0' 30'</p></div> <div><p>1/4 CORNER</p><p>N 00°04'32" E 1314.30'</p><p>S 00°04'04" W 1314.42'</p><p>103'</p><p>PAVED COUNTY ROAD</p><p>SECTION CORNER</p></div> <div><p>NOTE: THE BASIS OF BEARINGS IS GEODETIC NORTH DERIVED FROM G.P.S. OBSERVATIONS AT A CONTROL POINT LOCATED AT LAT: 40°18'23.57718"N &amp; LONG: 110°13'58.14329"W USING THE UTAH STATE G.P.S. VIRTUAL REFERENCE STATION CONTROL NETWORK MAINTAINED AND OPERATED BY THE AUTOMATED GEOGRAPHIC REFERENCE CENTER</p></div>		
DESCRIPTION OF CORNER EVIDENCE FOUND  FOUND 5/8" REBAR WITH PLASTIC CAP STAMPED; "HORROCKS ENGINEERING" AT 1/16 CORNER		
DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER  REFERENCED AS SHOWN		
STATE PLANE COORDINATE DATA (U.S. SURVEY FEET) NAD 83 UTAH CENTRAL ZONE N: 7277150.48 E: 1997821.29	LATITUDE: 40°17'26.27521" N LONGITUDE: 110°13'07.40859" W  PUBLIC LAND SURVEY SYSTEM GCDB ID NO. UT300020S0030W0_400320	
<div>CERTIFICATION I <u>Jerry D. Allred</u> , Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same  Date <u>8 FEB '16</u>  Jerry D. Allred, Professional Land Surveyor Certificate No. 148951 Duchesne County Surveyor</div> <div></div>		